


STECKEINSÄTZE - INNENABDICHTUNG

Q = 2 - 600 l/min

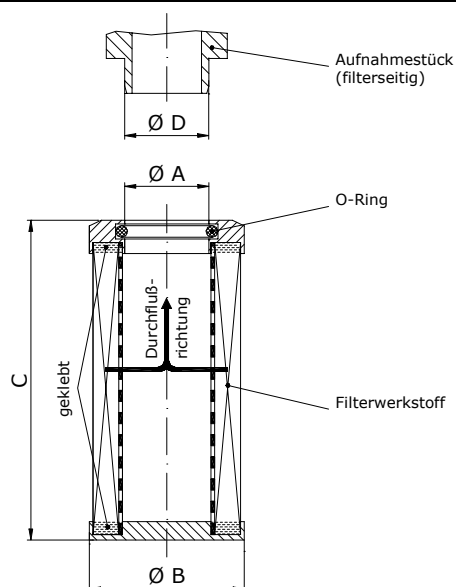

Werkstoffe:

Metallteile: Stahl brüniert bzw. Aluminium
Dichtung: Perbunan

Drahtgewebe: Edelstahl
Metallfaservlies: Edelstahl

andere Werkstoffe auf Anfrage

*) Feinheit µm:

n = nominal
a = absolut

Filterwerkstoff	max. Δp bar	Feinheit µm*)	Q = l/min								
			2	5	20	40	80	150	220	300	600
Maße	Ø A ^{H8}		9,57	11,20	22,40	25,60	32,00	27,20	32,00	32,00	35,20
	Ø B ±0,5		22,00	28,30	42,00	45,00	52,00	75,00	75,00	75,00	97,00
	C ±1,0		48,00	69,00	86,50	112,00	117,00	144,50	255,00	326,00	326,00
	Ø D _{f7}		9,53	11,10	22,23	25,40	31,75	26,98	31,75	31,75	34,93
Filterpapier	10	10 n	40258	40121	40005	40005	40007	40008	40163	40177	40009
		25 n	40259	40122	40010	40011	40012	40013	40164	40178	40014
	20	10 n	---	40129	40040	40041	40042	40043	40165	40179	40044
		25 n	---	40130	40045	40046	40047	40048	40166	40180	40049
Drahtgewebe	20	25 a	40158	40124	40020	40021	40022	40023	40168	40182	40024
		40 a	40157	40125	40070	40071	40072	40073	40169	40183	40074
		60 a	40261	40126	40025	40026	40027	40028	40170	40184	40029
		100 a	40111	40127	40030	40031	40032	40033	40171	40185	40034
	210	25 a	---	40132	40055	40056	40057	40058	40173	40187	40059
		40 a	---	40133	40075	40076	40077	40078	40174	40188	40079
		60 a	---	40134	40060	40061	40062	40063	40175	40189	40064
		100 a	---	40114	40065	40066	40067	40068	40176	40190	40069
Metallfaservlies	20	3 a	40538	40541	40547	40553	40559	40565	40571	40577	40583
		5 a	40539	40542	40548	40554	40560	40566	40572	40578	40584
		10 a	40540	40543	40549	40555	40561	40567	40573	40579	40585
	210	3 a	---	40544	40550	40556	40562	40568	40574	40580	40586
		5 a	---	40545	40551	40557	40563	40569	40575	40581	40587
		10 a	---	40546	40552	40558	40564	40570	40576	40582	40588

microfilter gmbh

Kirschenwasen 12
D-74670 Forchtenberg

Tel.: + 49 / 7948 / 94 170
Fax: + 49 / 7948 / 94 17 290